

DLC DRUMLESS COOLING CONVEYOR

MISUZU KOKI CO., LTD.

Unit Features _____

- Quiet operation with the adoption of proprietary resin links.
- Bottom loading, and bottom unloading types can also be produced.
- Race track types can also be produced.
- Washing machine to remove dirt from the belt is recommended.

Basic Specifications _____

- Belt Width: 400W~800W
- Belt Materials: Bar Section (SUS304)

: Link Section (polyacetal)




DRUMLESS COOLING CONVEYOR



Open space around the inner circumference



- Effectively utilize the open space around the inner circumference with a multi-stage drive.
- Reduce waste reservoir to zero with internal cleaning.

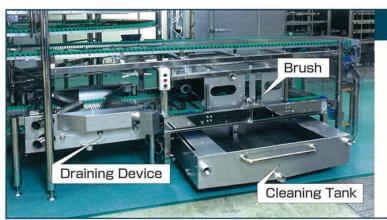

Belt Washer

- Keep belt surface hygienic by cleaning belt with hot water.
- When not washing, the brush is raised so that it is not in contact with the belt.
- Belt is dried in the draining device after washing.
- Wash tank can be removed for cleaning.
- Auto cleaning with the press of a button after production.

Select the belt to suit your product Select the belt depending on the product to be conveyed.

Easy Maintenance

- Belt and link can be replaced using just a single flat-blade screwdriver.
- No electric tools are necessary, and all links are inn joint form. Anyone can easily make replacements.



* The specifications in this catalog are subject to change without notice. 20140101Y(1)1,00 10



Grid Type

MISUZU KOKI CO., LTD.

Mesh Type

Tokyo Sales Office

http://www.misuzukoki.jp E-mail:info@misuzukoki.co.jp

Headquarters 530Kitagomizuka Kusu-Cho Yokkaichi-City Mie 510-0103 Japan

TEL 81-59-397-3211 FAX 81-59-397-3217 3FI., Daimon KS Bldg., 1-2-1, Shibadaimon Minato-Ku, Tokyo 105-0012 Japan

TEL 81-3-3434-2936 FAX 81-3-3434-2939 5FI., Minami Senba Mizorogi Bldg., 2-10-20 Minami Senba Chuo-ku, Osaka-City Osaka, 542-0081 Japan Osaka Sales Office